



// ONE BRAND // ONE SOURCE // ONE SYSTEM



TYRE LIFT SPREADER RHS 300-2

The newest generation of tyre lift spreaders for preparing the inspection and repair of agricultural, truck, EM and industrial tyres for tyres with a maximum width of 1700 mm (outer diameter) or 300 kg weight.

TYRE LIFT SPREADER RHS 300-2

Benefits

- Table tilt range of 0 to 40 degrees allows ergonomic working when repairing shoulder area damage
- A tool tray (Ref. No. 570 1500) is optionally available to keep buffing tools plus various air buffers neatly arranged and within easy reach
- Compressed air strip on the tyre lift spreader supplies air for up to 4 pneumatic tools
- Slimline design of the machine optimises work comfort even in the smaller workshop
- Eye-level pneumatic controls
- The design of the spreader claws has been enhanced so that super single tyres can also be handled
- Mounting plate for magnetic work lights included

Technical properties

Tyre size (inch)	max. 520/60 R38
Lifting capacity at 10 bar (kg)	max. 300 kg
Lifting height (mm)	880 (upper edge of roller)
Roll-on height (mm)	280 (upper edge of roller)
Tilt range	40° (to operator's side)
Operating pressure	10 bar / 145 PSI
Weight (kg)	223 kg
Size mm	L 1380 x W 800 x H 1500 mm

Tyre lift spreader RHS 300-2

Ref. No. 519 9211

Accessories


- 570 1500 Tool tray
- 570 1510 Slide
- 570 1520 Compressed air rail, complete
- 570 1530 Multi-socket power strip, 4 outlets
- 570 1540 Ramp
- 570 1550 Supporting rod for large-size tyres
- 570 1650 Maintenance unit, complete
- 570 1660 Mounting kit for maintenance unit

Spare and wear parts

- 570 1600 Elevating cylinder
- 570 1601 Spreading cylinder
- 570 1602 Swiveling cylinder
- 570 1610 Set of seals for cylinder



REMA TIP TOP AG
Gruber Strasse 65 · 85586 Poing / Germany
Phone: +49 8121 707-100
Fax: +49 8121 707-10 222
info@tiptop.de
www.rema-tiptop.com

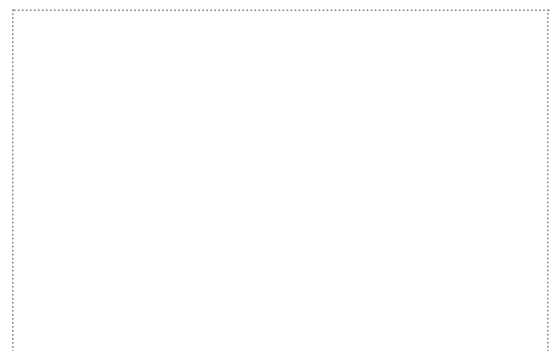

Your local contact